



# DESSALATOR DUO - Quick Guide for regular use

## START-UP PROCEDURE

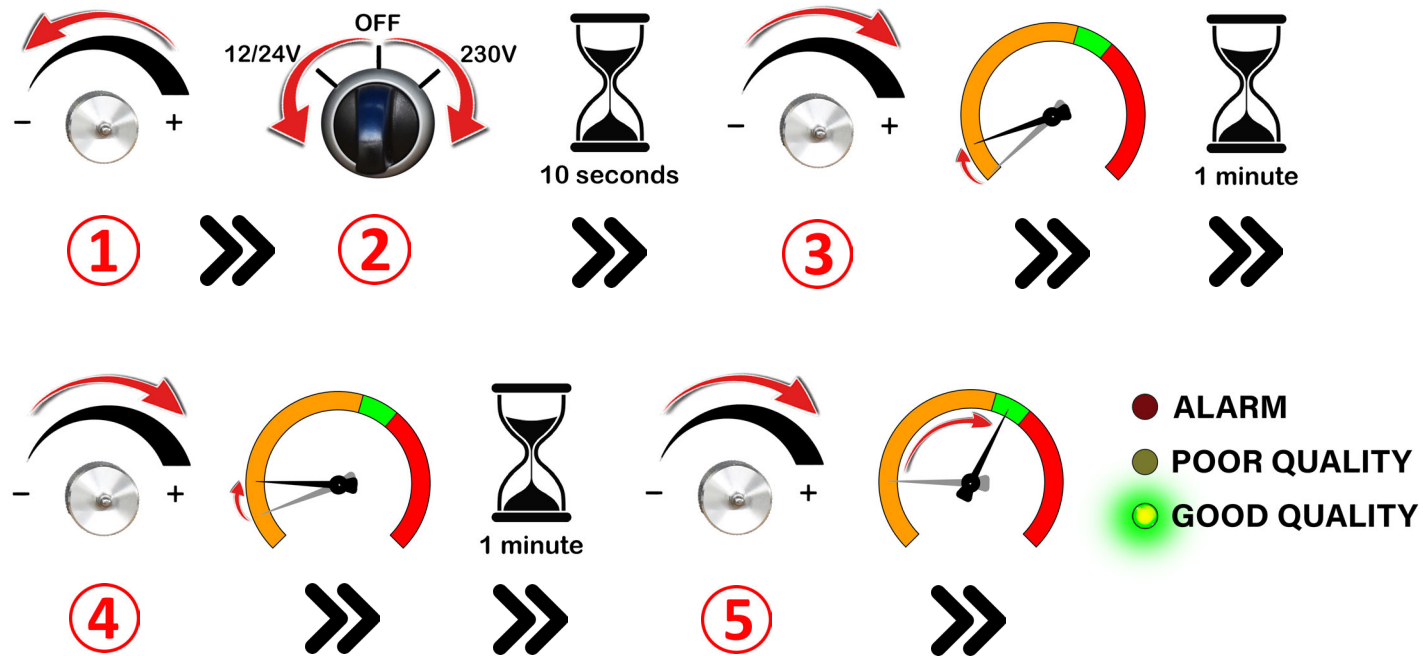

- 1** Make sure the hull valve for the watermaker is opened, the selection valve on the pre-filter is in the sea water position and turn the pressure regulator knob almost fully counter clockwise (towards the (-) position).
- 2** Select the power source to be used: 12/24VDC or 230VAC.
- 3** Wait until only the YELLOW LED blinks. Slightly increase the pressure up to 8 o'clock on the pressure gauge using the regulator knob. Stay in this position for about one minute.
- 4** Then increase the pressure to 9 o'clock using the regulator knob. Stay in this position for about one minute.
- 5** Now you can increase the pressure to the green zone on the pressure gauge. When the water quality LED lights up green, your water maker produces fresh water.

## SHUTDOWN PROCEDURE

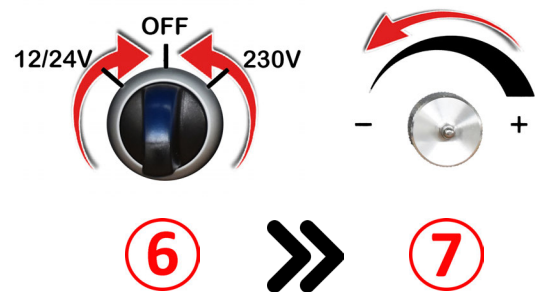

- 6** Set the power switch to OFF, to stop the water maker.
- 7** Turn the knob pressure regulator almost fully counter clockwise (towards the (-) position).

This Quick Guide is intended only as a reminder for everyday use. Make sure you are familiar with the contents of the full manual before using your watermaker. See [www.dessalator.com](http://www.dessalator.com) or flash this QR code.



# DESSALATOR<sup>®</sup>

[www.dessalator.com](http://www.dessalator.com)

